


# UX10 FULLY RUGGED TABLET



- 12<sup>th</sup> Generation Intel® Core™ i7 / i5 Processor
- 10.1" FHD Lumibond display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen.
- Enhanced enterprise security with optional Intel® vPro®, Windows Hello face-authentication camera and multi factor authentication options.
- Versatile I/Os connectivity including Thunderbolt™ 4.
- Enhanced Wi-Fi, GPS and LTE performance.



UX10 3D demo

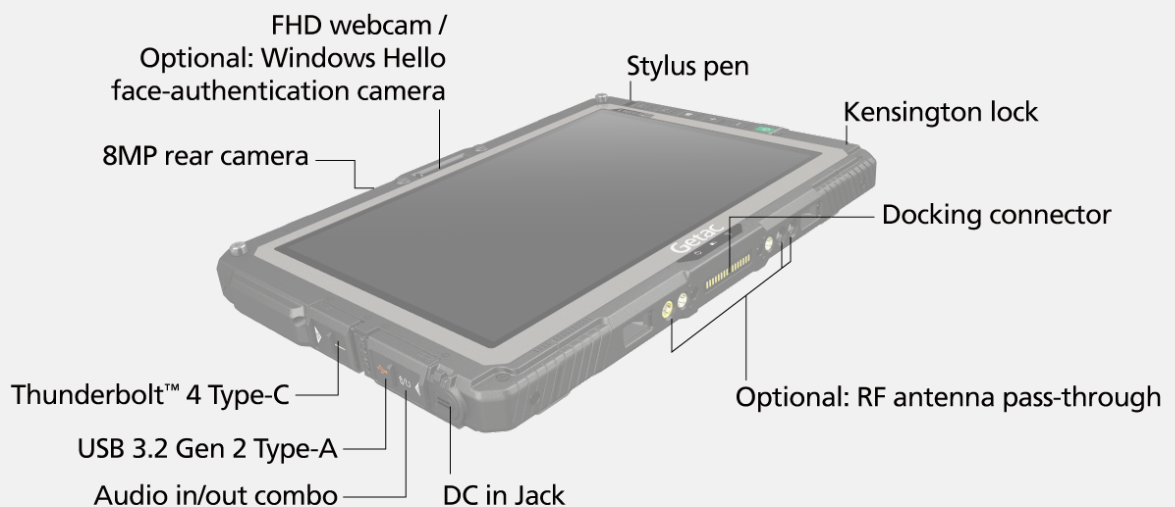

SPECIFICATIONS

Generation

G3

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1235U Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1245U vPro® Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Intel® Core™ i7-1255U Processor  
Max. 4.7GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Intel® Core™ i7-1265U Processor  
Max. 4.8GHz with Intel® Turbo Boost Technology  
- 12MB Intel® Smart Cache

Intel® Pentium™ 8505 Processor  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 8MB Intel® Smart Cache

Graphics

Intel® UHD Graphics

Display

10.1" Wide Viewing Angle TFT LCD WUXGA (1920 x 1200)  
Protection film  
1,000 nits LumiBond display with Getac  
sunlight readable technology  
Capacitive multi-touch screen

Storage & Memory

8GB DDR4  
Optional: 16GB / 32GB DDR4

256GB PCIe NVMe SSD  
Optional: 128GB / 1TB PCIe NVMe SSD

Keyboard

Power button  
5 tablet programmable buttons

Pointing Device

Touchscreen  
- Capacitive multi-touch screen  
- Optional: Dual mode touchscreen  
(multi-touch and digitizer)

Audio

Integrated stereo speakers  
Integrated dual-array microphone

Expansion Slot

Optional (top side): 1D/2D imager barcode reader,  
or Serial port, or USB 3.2 Gen 1 Type-A port,  
or LAN port (RJ45), or microSD  
or HF RFID reader ,  
or HDMI 2.0.<sup>ii</sup>  
Optional (right side): LAN port (RJ45)  
or Fingerprint reader<sup>iii</sup>  
Optional (back side): Smart card reader,  
or Bridge battery, or Bridge battery +  
Smart card reader<sup>iv</sup>

I/O Interface

FHD webcam x 1<sup>v</sup>  
8MP auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 2 Type-A x 1  
Thunderbolt™ 4 Type-C x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Micro-SIM, 3FF)<sup>ix</sup>  
Optional: Windows Hello face-authentication camera  
(front-facing) x 1<sup>v</sup>  
Optional: RF antenna pass-through for GPS,  
WWAN and WLAN

Communication Interface

Optional: 10/100/1000 base-T Ethernet  
Intel® Wi-Fi 6E AX211, 802.11ax  
Bluetooth (v5.3)<sup>vi</sup>  
Optional: Dedicated GPS with L1/L5<sup>ix</sup>  
Optional: 4G LTE mobile broadband with  
integrated GPS<sup>vii, viii, ix</sup>  
Optional: 5G Sub-6 with integrated GPS<sup>vii, viii, ix</sup>  
Optional: Dual SIM (Micro-SIM 3FF and e-SIM)<sup>vii, ix</sup>

Security Feature

TPM 2.0  
Kensington lock  
Optional: Intel® vPro® Technology  
Optional: HF RFID reader<sup>xi</sup>  
Optional: Fingerprint reader<sup>iii</sup>  
Optional: Smart card reader<sup>iv</sup>  
Optional: Windows Hello face-authentication  
camera (front-facing)<sup>v</sup>  
Optional: Absolute Persistence®

Power

AC adapter (65W, 100-240VAC, 50/60 Hz)  
Li-ion battery (11.1V, typical 4200mAh; min. 4080mAh) x 1  
Optional: High capacity Li-ion battery (10.8V, 9240mAh) x 1  
Optional: Bridge battery<sup>xv</sup>

Dimension (W x D x H) & Weight

279 x 194.5 x 23.5mm (10.98" x 7.65" x 0.92")<sup>\*</sup>  
1.22kg (2.68lbs)

Rugged Feature

MIL-STD-810H certified  
IP66 certified  
MIL-STD-461G certified<sup>xi</sup>  
Vibration & 6ft (1.8m) drop resistant<sup>xii</sup>  
- Storage: -51°C to 71°C / -60°F to 160°F  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213  
(Class I, Division 2, Groups A, B, C, D)<sup>xiii</sup>

Environmental Specification

Temperature<sup>xiv</sup> :  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

Pre-installed Software

Getac Utility  
Getac Camera  
Getac Geolocation  
Getac Barcode Manager<sup>xv</sup>  
Getac Driving Safety Utility (trial version)  
Getac KeyWedge Barcode Reader Utility (trial version)  
Optional: Absolute Secure Endpoint  
Optional: Absolute Secure Access

Optional software

Getac Driving Safety Utility  
Getac KeyWedge Barcode Reader Utility  
Getac Device Monitoring System (GDMS)  
Getac Monitoring  
Getac VGPS Utility<sup>xvi</sup>

Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh)  
AC adapter (65W, 100-240VAC)  
Capacitive stylus with tether

Optional:

Carry bag  
Folio case  
Battery (11.1V, typical 4200mAh; min. 4080mAh)  
High capacity Li-ion battery (10.8V, 9240 mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC)  
AC adapter (90W, 100-240VAC)  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Digitizer pen with tether  
Capacitive stylus with tether  
Protection film  
Hard handle  
Rotating hand strap with kickstand  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Detachable keyboard  
Vehicle cradle<sup>xvii</sup>  
Keyboard dock  
Vehicle dock<sup>xviii</sup>  
Office dock  
100W Type-C adapter  
Getac DS100 USB-C docking station with AC adapter

UX10 FULLY RUGGED TABLET

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, LAN port (RJ45), HF RFID reader, MicroSD and HDMI 2.0 are mutually exclusive options.
- III. Fingerprint reader and LAN Port are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- VIII. Supports GPS, GLONASS, Galileo, BeiDou and QZSS. Only available in US, UK, EU, Australia and New Zealand.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. Weight and dimensions vary from configurations and optional accessories.
- XI. MIL-STD-461 90W AC adapter sold separately.
- XII. Drop test results vary from configurations and optional accessories.
- XIII. Available with limited configurations and environment conditions.
- XIV. Tested by an independent third-party test lab following MIL-STD-810H.
- XV. Available when barcode reader option is selected.
- XVI. Models require either embedded or standalone GPSmodule.
- XVII. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

|                      | Vehicle Dock                  | Office Dock                   |
|----------------------|-------------------------------|-------------------------------|
| Serial Port          | 1                             | 1                             |
| External VGA         | -                             | 1                             |
| Microphone           | -                             | 1                             |
| Audio Output         | -                             | 1                             |
| DC in Jack           | 1                             | 1                             |
| USB                  | USB 2.0 x 2 USB 3.2 Gen 1 x 2 | USB 2.0 x 2 USB 3.2 Gen 1 x 2 |
| LAN                  | 1                             | 1                             |
| HDMI 1.4             | -                             | 1                             |
| RF Antenna Connector | 3 (WWAN, WLAN, GPS)           | -                             |
| Kensington Lock      | 1                             | 1                             |



Getac USA

15495 Sand Canyon Ave. Suite 350 Irvine,  
CA 92618 Tel : 949-681-2900  
GetacSales\_US@getac.com |  
www.getac.com/us/  
Copyright © 2026 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only,available specification shall be subjected to  
quotation by request.